



INVESTOR IN PEOPLE

The Patent Office

Concept House

Cardiff Road

Newport

South Wales

NP10 8QQ

REC'D 22 JUN 2004

WIPO

PC1

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

10 June 2004


BEST AVAILABLE COPY

The
Patent
Office

21MAR03 E794061-3 D02835
P01/7700 0.00-6306491.2

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

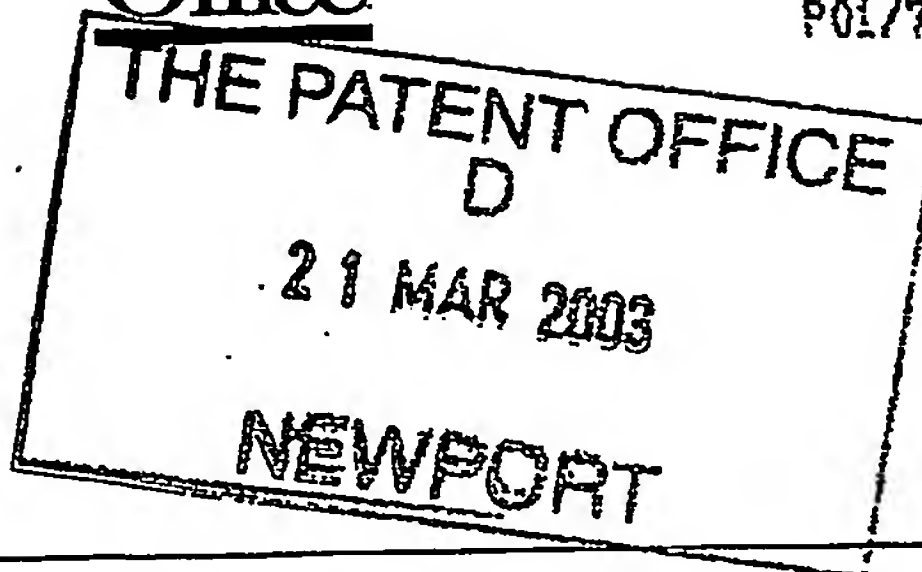

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference WMO/JAW/P200424

2. Patent application number
(The Patent Office will fill in this part)
0306491.2

3. Full name, address and postcode of the or of each applicant (underline all surnames)
Orr, William McLean
8th Floor, Tower House
Merrion Way
Leeds, LS2 8PA

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

8420713002

4. Title of the invention
Jaw crusher

5. Name of your agent (if you have one) Urquhart-Dykes & Lord

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Tower House
Merrion Way
Leeds
LS2 8PA

Patents ADP number (if you know it)

1644004

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 4

Claim(s) 2

Abstract

Drawing(s) 1 21

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

19-3-03

12. Name and daytime telephone number of person to contact in the United Kingdom

W M Orr - 0113 2452388

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

JAW CRUSHER

This invention relates to a jaw crusher having two jaws which define an upwardly open crushing chamber for receiving crushable material and a discharge opening between the lower ends of the jaws for discharging crushed material, the jaws being relatively
5 movable so as to vary the size of the crushing chamber and apply a working action and a relieving action on the crushable material.

Jaw crushers usually comprise a first fixedly mounted jaw and a second movably mounted jaw which is driven by an oscillating drive mechanism to and fro, relative to the fixed jaw in order to apply the working and relieving actions on the material. As the
10 material is crushed to smaller size, it migrates downwardly under gravity action towards, and eventually downwardly through the discharge opening.

It is normal to provide "wear plates" on the facing surfaces of the two jaws, and which necessarily are of robust and durable construction, and assembly to the jaws, in view of the arduous nature of the working environment i.e. crushing rocks. However, over a
15 period of time, it is inevitable that the wear plates become subject to unacceptable wearing action and require to be replaced.

Obviously, the operation of the jaw crusher must be interrupted, so that wear plate replacement can take place, and which represents significant downtime of an expensive piece of capital equipment, which clearly is undesirable and has cost implications to the
20 overall efficiency of the crushing operation. Also, since the wear plates extend continuously throughout the facing surfaces of the jaws, an entire wear plate must be replaced, even if unacceptable wear or damage has arisen on a small portion only of the surface of the wear plate.

Furthermore, substantial dust and other debris is inevitably generated during a
25 crushing operation, and which can migrate into corners and crevices and become lodged there, and which can include access openings leading to fasteners which are used to secure the wear plates to the jaws (wear plates are usually bolted to corresponding jaw beams). This can further increase the downtime in having to release jammed fastener fittings.

The present invention therefore has been developed primarily with a view to
30 facilitate the replacement of a worn working component on the facing surface of at least one of the jaws of a jaw crusher.

According to the invention there is provided a jaw crusher having two jaws which define an upwardly open crushing chamber for receiving crushable material and a discharge opening between the lower ends of the jaws for discharging crushed material, in which:

the jaws are relatively movable so as to vary the size of the crushing chamber and
5 apply a working action and a relieving action on the crushable material;

each jaw has a durable facing surface which is engagable with the crushable material; and

a set of interconnected jaw plates is provided for at least one of the jaws and is arranged so that at least some of the jaw plates form at least part of the facing surface of the
10 jaw, said set of jaw plates being movably mounted on the jaw.

The movement of the set of jaw plates may be continuous, semi-continuous, intermittent, or in case of need only.

Preferably, the movement of the set of jaw plates is continuous, and in a downward direction with respect to the facing surface of the jaw, and which assists in
15 applying a downward pulling force on the material between the jaws. This also brings successive jaw plates into position on the facing surface, and which reduces the wearing action compared with the action to which a fixed wear plate is exposed.

As an alternative, the jaw plates on the facing surface may be moved when wear arises, so that a different array of jaw plates can be moved to form part of the facing
20 surface.

Preferably, the set of interconnected jaw plates is movable throughout the facing surface of the jaw, and such movement may be downward movement. However, it is within the scope of the invention for the movement to be upward movement; or to be transverse movement in a direction from front to rear, or rear to front, with respect to the
25 crushing chamber.

The set of jaw plates may form an endless array which is guided to move along an endless track. Such track may be mounted on front and rear faces of a beam of the jaw.

In the event of damage or excessive wear to any one or more individual jaw plate, it is preferred that each jaw plate is arranged to be easily mountable in, or removed from
30 the set of interconnected jaw plates, so that replacement can be easily carried out.

With an endless track, it may be convenient for worn plates to be replaced as they move along the rear face of the jaw beam when, of course, they are inoperative.

It is particularly preferred that the set of interconnected jaw plates is mounted on a fixed jaw of a two jaw crusher, in which one jaw is fixed and the other jaw is movable to and fro under the action of an eccentric drive mechanism relative to the fixed jaw.

The movable jaw preferably also has a double toggle linkage coupled therewith.

5 A preferred embodiment of jaw crusher according to the invention will now be described in detail, by way of example only, with reference to the accompanying schematic drawing, which is a front view of the fixed and movable jaws of a two jaw crusher.

Referring to the drawing, a jaw crusher according to the invention is designated generally by reference 10, and has two jaws 11 and 12 which define an upwardly open
10 crushing chamber 13 for receiving crushable material and a discharge opening 14 between the lower ends 15 and 16 of the jaws 11 and 12 for discharging crushed material.

The jaws 11 and 12 are relatively movable so as to vary the size of the crushing chamber 13 and apply a working action and a relieving action on the crushable material. Also, each jaw has a durable facing surface which is engageable with the crushable
15 material. Conventionally, the jaws of a jaw-type rock crusher have wear plates mounted on respective jaw beams of the jaw crusher.

In the illustrated embodiment, which is preferred, the jaw 11 is a fixed jaw, and the jaw 12 is a movable jaw which is moved to and fro relative to the fixed jaw 11 under the action of a fly wheel-driven eccentric drive coupled with the upper end of the movable
20 jaw 12, and shown schematically by reference 17 for the eccentric and reference 18 for the fly wheel. This forms an oscillating drive mechanism which applies limited to and fro movement to the upper end of the movable jaw 12, whereby to apply necessary powerful crushing action on the rock material or other crushable material received continuously or semi-continuously by the chamber 13. The movable jaw 12 also has a double toggle.
25 linkage shown schematically only and designated by reference 19, and which is adjustable to set any required width of the discharge opening 14.

The movable jaw 12 may have a conventional "swing jaw plate" 20 which forms the facing and working surface of the movable jaw 12. However, the fixed jaw 11 does not have a conventional wear plate forming its facing surface, but is provided with a
30 particularly preferred embodiment of the invention which will now be described in detail.

In particular, the jaw 11 is provided with a set of interconnected jaw plates which is arranged so that at least some of the jaw plates form at least part of the facing surface of

the jaw 11. In the illustrated embodiment, the entire facing surface of the jaw is actually formed by the set of interconnected jaw plates, and this is a preferred arrangement.

Further, the set of jaw plates is movably mounted on the jaw 11 so that when at least part of the facing surface becomes worn, a different array of jaw plates can be moved to replace the previously worn or damaged part of the facing surface.

In a preferred mode of operation, the movement of the set of jaw plates is continuous, and in a downward direction with respect to the facing surface of the jaw, and which assists in applying a downward pulling force on the material between the jaws. This also brings successive jaw plates in to position on the facing surface, and which reduces the wearing action compared with the action to which a fixed wear plate is exposed.

The set of interconnected jaw plates is designated generally by reference 21 and, in the illustrated embodiment, is an endless array which is guided to move along an endless track 22 which is mounted on the front and rear faces of a beam 23 of the jaw 11. The set of jaw plates 21 therefore has a working run 21a, as the individual jaw impact plates move downwardly over the facing surface, and an upward return run 21b when the jaw plates are out of use. Upper and lower drive sprockets 24 and 25 respectively drive the endless set of jaw plates around the endless track 22. The movement may be continuous, semi-continuous, intermittent, or in case of need only. A tension adjustment mechanism 26 may be provided, engageable with the lower sprocket 25.

The set of interconnected jaw plates 21 is assembled from a number of individual jaw impact plates 27, and which can be easily mounted in position, or removed, so that replacement can easily be carried out in the event of damage or unacceptable wear to individual plates 27. Evidently, it may be convenient for worn or damaged impact plates 27 to be replaced as they are moving along the upwardly moving rear inoperative run 21b.

The illustrated embodiment provides for downward movement of the set of plates 27 along the facing surface of the jaw 11, and upward movement along the rear face of the jaw. Evidently, this movement could be reversed. Alternatively, the set of interconnected jaw plates may be mounted so as to be movable from front to rear, or from rear to front, with respect to the chamber 13 and perpendicularly of the general plane of the jaw 11.

It is preferred that the set of interconnected jaw plates 21 is provided on the fixed jaw 11. However, it is within the scope of the invention for such arrangement, suitably modified, to be mounted on the movable jaw 12 in addition, or as an alternative.

CLAIMS

1. A jaw crusher (10) having two jaws (11, 12) which define an upwardly open crushing chamber (13) for receiving crushable material and a discharge opening (14) between the lower ends (15, 16) of the jaws (11, 12) for discharging crushed material, in
5 which:

the jaws (11, 12) are relatively movable so as to vary the size of the crushing chamber (13) and apply a working action and a relieving action on the crushable material; each jaw (11, 12) has a durable facing surface (21, 20) which is engagable with the crushable material; and

10 a set (21) of interconnected jaw plates (27) is provided for at least one of the jaws (11) and is arranged so that at least some of the jaw plates (27) form at least part of the facing surface of the jaw (11), said set (21) of jaw plates being movably mounted on the jaw (11).

2. A jaw crusher according to claim 1, in which the set (21) of interconnected jaw
15 plates (27) is movable throughout the facing surface of the jaw (11).

3. A jaw crusher according to claim 2, in which the movement throughout the facing surface of the jaw (11) is downward movement.

4. A jaw crusher according to claim 2, in which the movement of the set (21) of jaw plates (27) is transverse movement in a direction from front to rear, or rear to front,
20 with respect to the crushing chamber (13).

5. A jaw crusher according to any one of claims 1 to 4, in which the set (21) of jaw plates (27) forms an endless array which is guided to move along an endless track (22).

6. A jaw crusher according to claim 5, in which the track (22) is mounted on the front and rear faces of a beam (23) of the jaw (11).

25 7. A jaw crusher according to any one of the preceding claims, in which each jaw plate (27) is arranged to be easily mountable in, or removable from the set (21) of interconnected jaw plates, so that replacement can easily be carried out.


8. A jaw crusher according to any one of the preceding claims, in which the set (21) of interconnected jaw plates (27) is mounted on a fixed jaw (11) of a crusher (10), the
30 other jaw (12) being movable to and fro under the action of an eccentric drive mechanism (17, 18) relative to the fixed jaw (11).

9. A jaw crusher according to claim 8, in which the movable jaw (12) is coupled with a double toggle linkage (19).

10. A jaw crusher according to claim 1, in which the set (21) of jaw plates is continuously movable downwardly with respect to the facing surface of the jaw, to assist in pulling downwardly the material which is located between the jaws.

JAW CRUSHER SCHEMATIC WITH ENDLESS TRACK ASSEMBLY FIXED SAW PLATE REPLACEMENT

1 1/2"

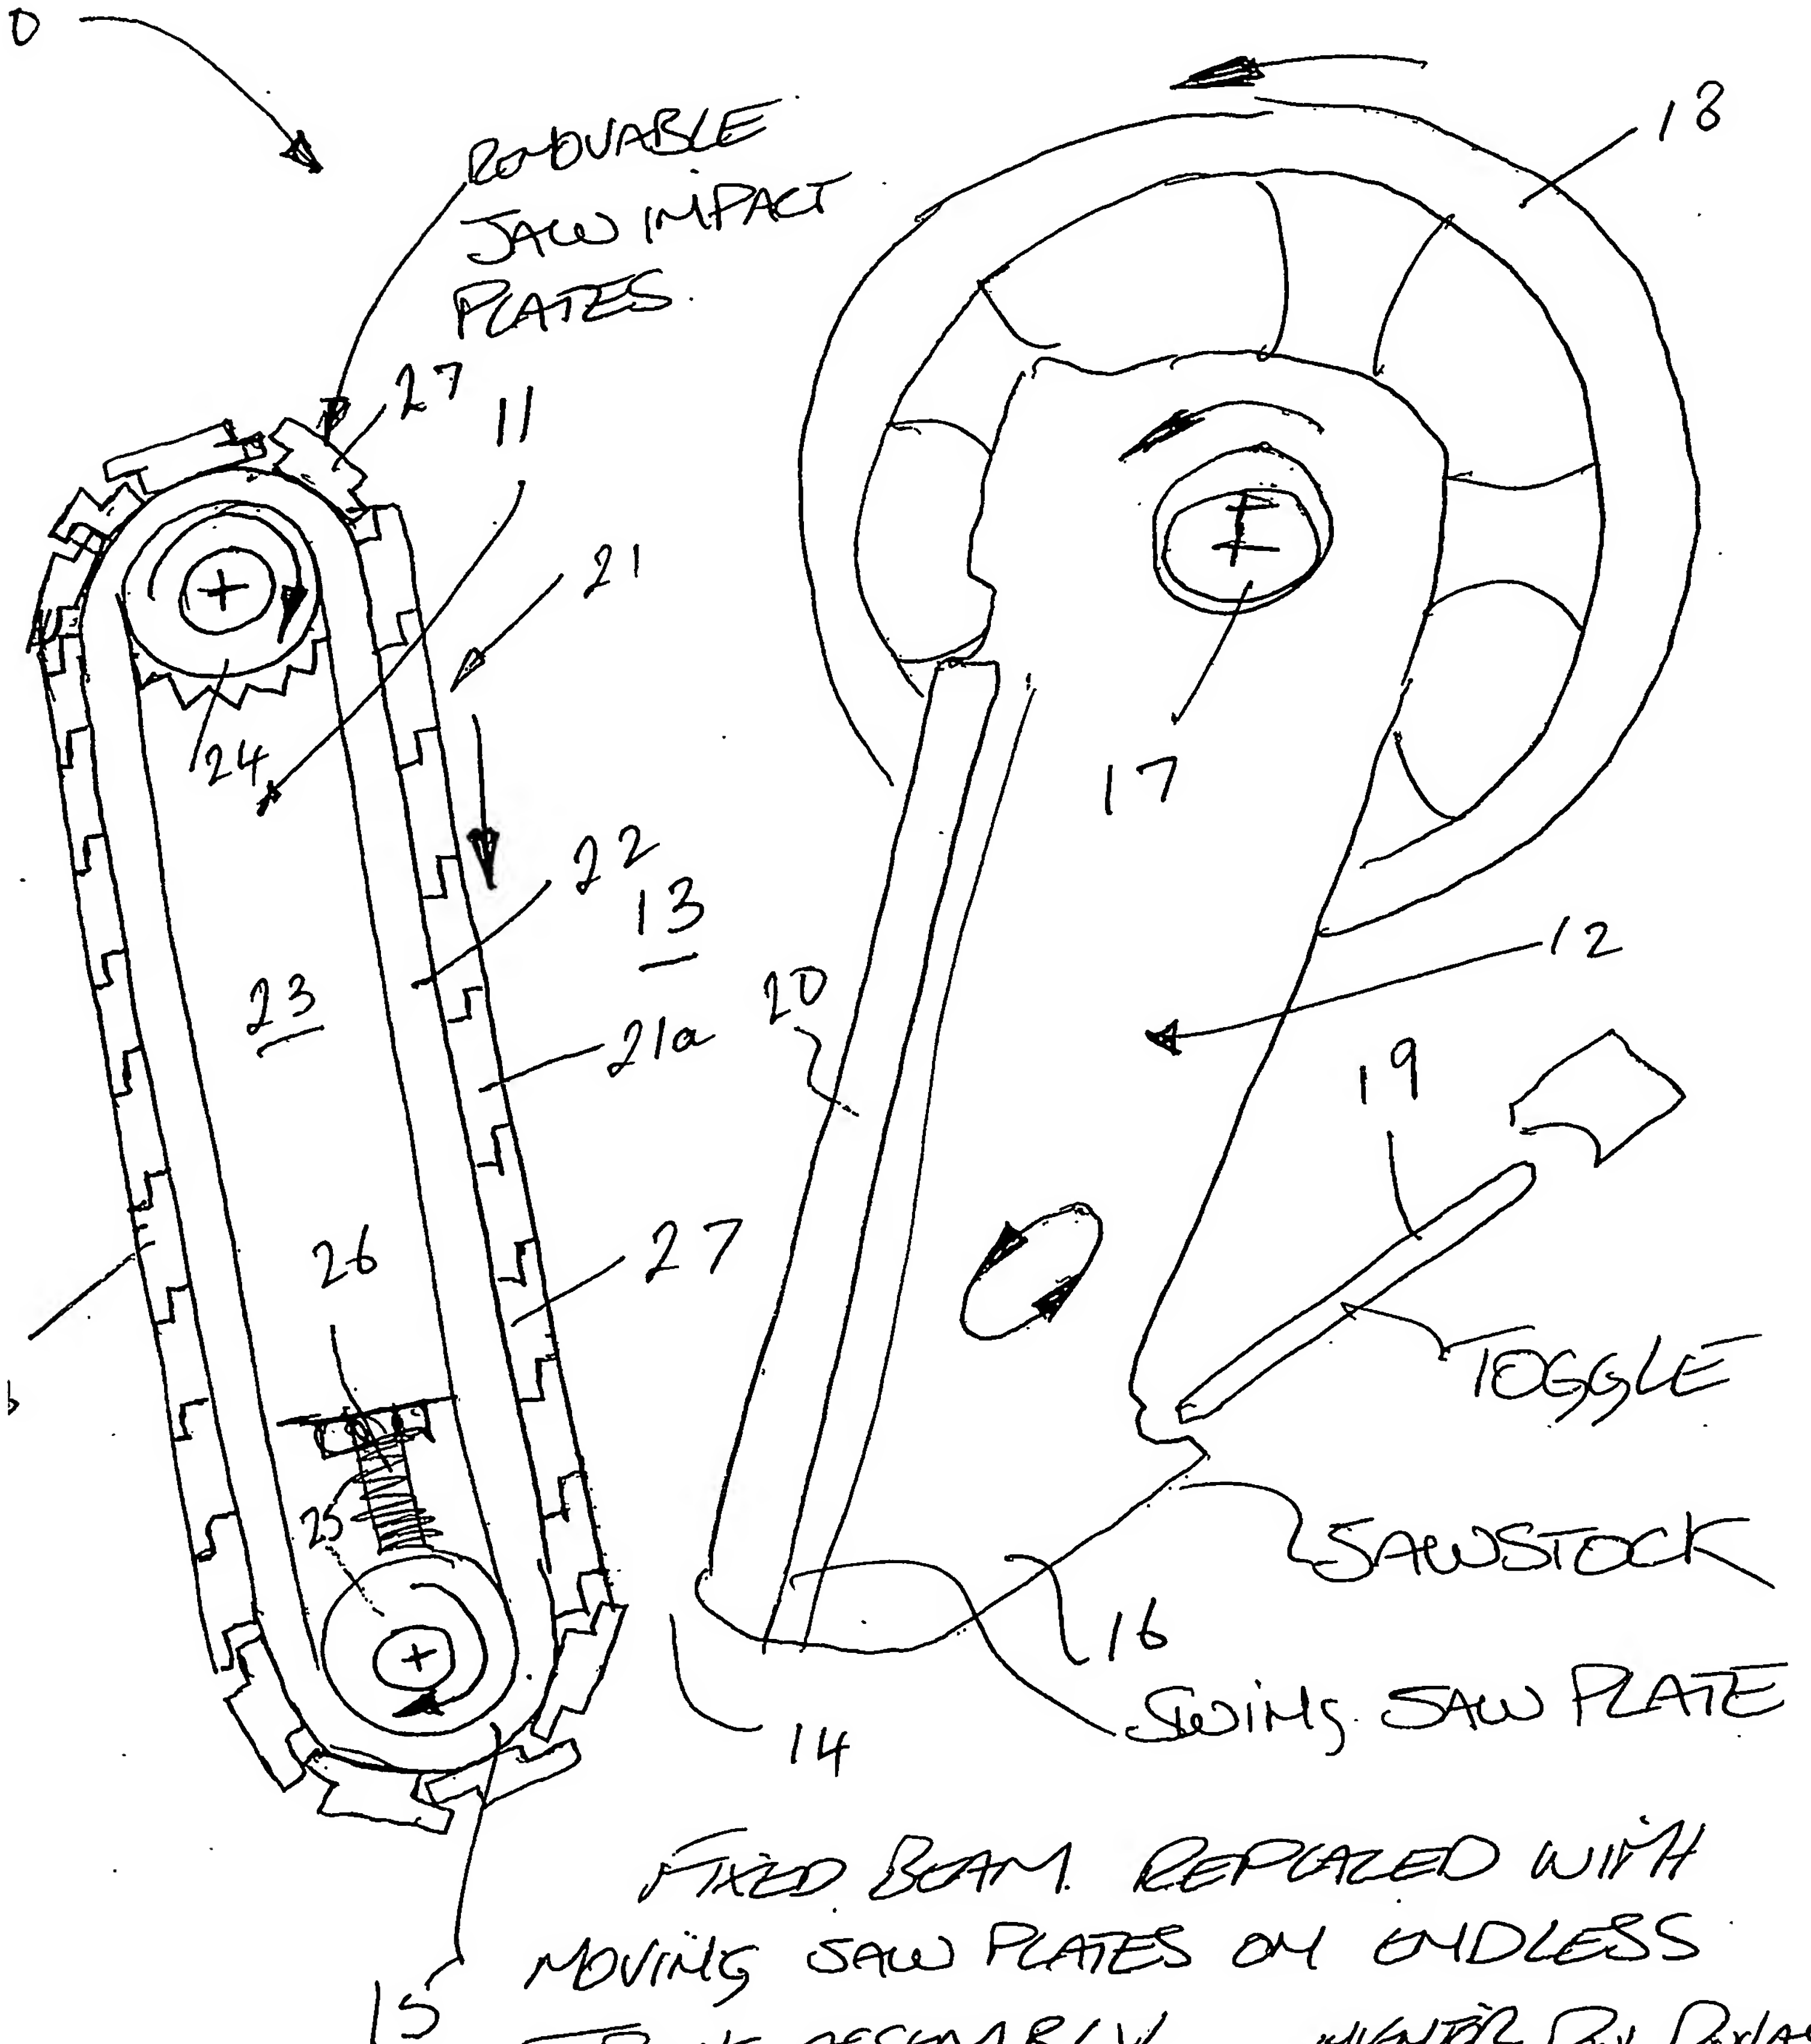

FIXED BEAM REPLACED WITH
MOVING SAW PLATES ON ENDLESS
TRACK ASSEMBLY.
INVENTOR PAUL DOLAS
2012/12/22

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.